


**DEGRÉS DE GRIS**

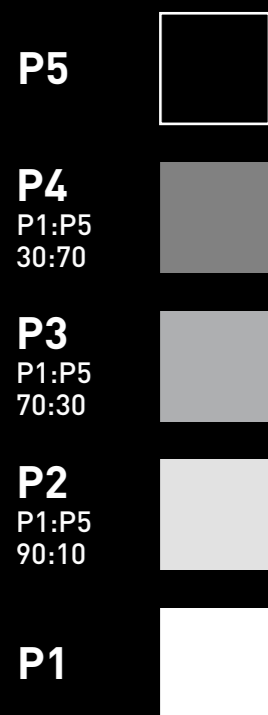

	EN VOLUME		
	SPECTRAL 2K	3	
	SPECTRAL H 6005 ou H 6115	1	
	SPECTRAL SOLV 855	10 ÷ 30%	

SPECTRAL H 6005 / 6115 SPECTRAL SOLV 855	FAST	STANDARD	SLOW	EXTRA SLOW
	15 ÷ 20 °C	20 ÷ 25 °C	25 ÷ 35 °C	+35 °C

S-D10	ADDITIF MATTANT
70% vol.	semi-mat
100% vol.	mat

